Introducing the all new

MAGNEX

Drill

MAGNETIC BASED DRILL









MAGNEX

Drill 50

ABN 21 060 672 979

TOOWOOMBA WELDING SUPPLIES





MAGNEX Drill



Safety is compromised when drilling holes. Time pressure on jobs lead to short-cuts being taken as additional processes and equipment is needed. Reliable power supply is required to have the drill magnetised to safely attach to steel.

Job sites have a wide range of steel thickness in various forms of application. It is the thin steel purlins or RHS etc... that traditional metal drills fail, simply because their magnet cannot adhere to the thin material securely.

Time (and money) are spent to ensure safe usage of drills by having to use secondary clamps, straps, chains or additional counter magnets.

The only one of its kind. Now available in Australia.

The new, unique Magnex Drill provides improved safety by using a powerful magnet that does not need a power supply to work. It adheres to even the thinnest steel sheets or beams allowing:

- Safe working environment magnet adheres without power supply
- Increased efficiency not having to use secondary clamps, straps, chains or additional counter magnets less time is spent getting the job done
- Wider range of application from 1.6mm+ steel whatever steel you're facing the Magnex will adhere to it

It comes in 2 sizes, the Magnex Drill 40 and Magnex Drill 50 (two speed workhorse), so no job is too big or too small. Getting it done fast, safe and reliable.








MAGNEX Drill 40

- Accepts cutters up to ø40mm & 50mm depth
- Quick-change arbor
- 105mm stroke
- 80mm height adjustable slide
- Gearbox On-load speed 450rpm
- Powerful I I 00 watt motor
- 2,800N magnetic adhesion (10mm)
- 2,300N magnetic adhesion (6mm)
- Very light and compact only 9.9kg
- Smooth start motor with overload protection and emergency stop
- Stepless adjustment slides
- Self-adjusting guides
- Soft touch grips
- Membrane keyboard
- Cord length 5m
- Comes with carrying case, safety belt and coolant equipment

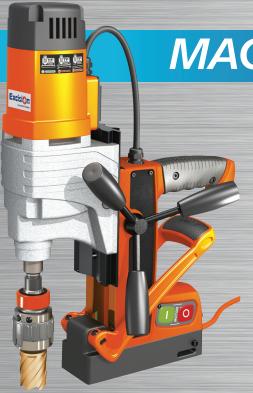

MAGNEX Drill 50

- Accepts cutters up to ø50mm & 50mm depth
- MK2 arbor
- 100mm stroke
- 47mm height adjustable slide
- 2-speed Gearbox On-load speeds: 250 & 450rpm
- Powerful 1200 watt motor
- 2,300N magnetic adhesion (10mm)
- 2,000N magnetic adhesion (6mm)
- Very light and compact only 11.5kg
- Smooth start motor with overload protection and emergency stop
- Stepless adjustment slides
- Self-adjusting guides
- Soft touch grips
- Membrane keyboard
- Cord length 5m
- Comes with carrying case, safety belt and coolant equipment

